

CITY OF KANSAS CITY, MISSOURI
SUPPLEMENT NO. 3
TO APWA STANDARD SPECIFICATIONS AND DESIGN CRITERIA
DIVISION II, SECTION 2300, INCIDENTAL CONSTRUCTION

The following additions, deletions, and/or revisions shall become a part of the adopted standard specification:

2301 Standard Sidewalk, Sidewalk Ramps, Driveways, and Bicycle/Pedestrian Paths

2301.4.B.2 Paragraph 2301.4.B.2 shall be revised to read:

2301.4.B.2 Material: Isolation joints shall be formed by a 1 piece, ½ inch (13mm) thick non-extruding preformed joint filler cut to the configuration of the abutting section. The filler material shall be full depth, and shall conform to ASTM D1751, D1752, *or D7174*. D1752 *or D7174* material shall be used against curved surfaces, around utility boxes or pole, or against other irregular surfaces, and may be used for all applications.

RESOLUTION


Be it resolved by the Director of Public Works of Kansas City, Missouri that the following listed Section of Division II, Construction and Materials Specifications, approved and adopted December 18, 2002 by the Kansas City Metropolitan Chapter of the American Public Works Association is approved and adopted as Official Standard Construction and Materials Specifications for the Department of Public Works of Kansas City, Missouri with like section and page numbers, except as modified by the replacement pages of the March 2005 KCMO Supplement and hereby further modified by the attached supplement.

Section 2300 Incidental Construction

A copy of said specifications criteria and supplement are attached hereto and incorporated herein by reference.

The criteria shall become effective April 1, 2006 and shall modify all previously adopted supplements to this section.

Approved and adopted as Official Document No. CS060090
this 22nd day of March, 2006.

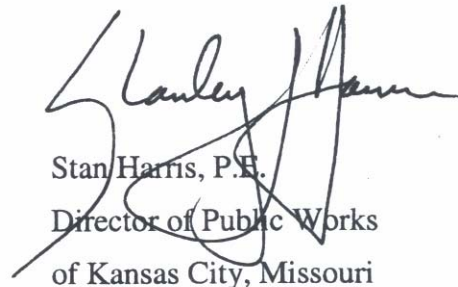

Stan Harris, P.E.
Director of Public Works
of Kansas City, Missouri

