
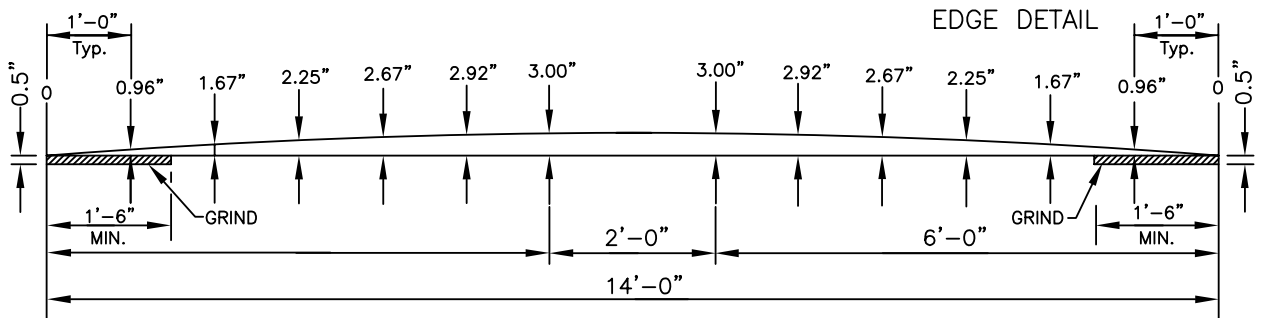



SPEED HUMP SPECIFICATIONS

IMPORTANT: Speed Humps to be 3" in height to provide maximum effectiveness, while not being overly restrictive to emergency police and fire vehicles.

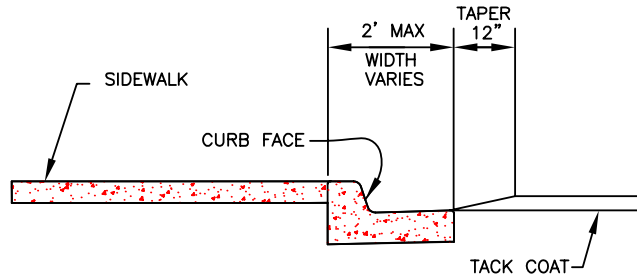

CROSS SECTION

1. Speed humps shall not be placed over manholes, water valves, survey monuments, ect.
2. Speed humps shall not be installed in a location such that roadway drainage is compromised.
3. Speed humps to be constructed with RC Type 01-3 Asphaltic Concrete or as Directed by KCMO. A tack coat shall be applied prior to application of pavement material.
4. Striping to be installed by contractor per KCMO Standards. Contact City of KCMO sign shop one week prior to installation to coordinate placement of signs.

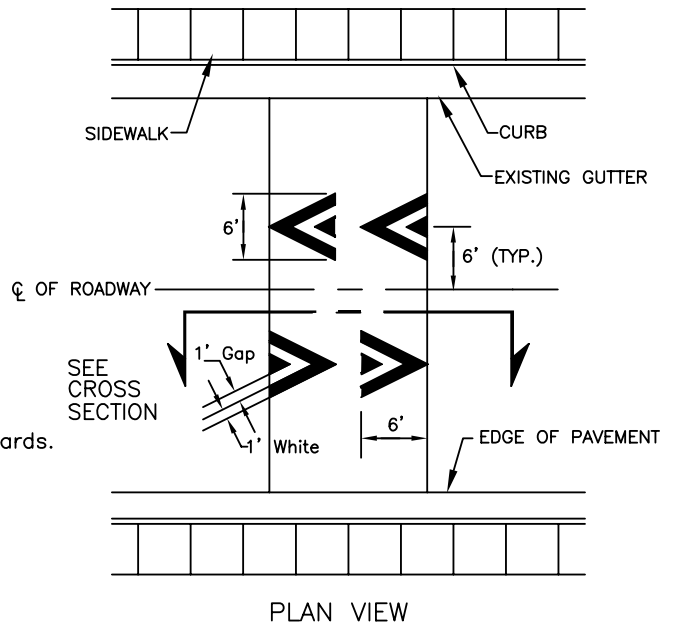

DETAIL 1:14' SPEED HUMP

KANSAS CITY, MISSOURI PUBLIC WORKS DEPARTMENT	
SPEED HUMP	
DRAWN BY: <u>BV</u> DATE: <u>1/15/10</u>	APPROVED BY: <u>JERRY NELSON</u> DATE: _____