

**CITY OF KANSAS CITY, MISSOURI**  
**SUPPLEMENT NO. 2**  
**TO APWA STANDARD SPECIFICATIONS AND DESIGN CRITERIA**  
**DIVISION II, SECTION 2700, STRUCTURES**

The following additions, deletions, and/or revisions shall become a part of the adopted standard specification:

**2703 Special Aggregate Concrete - Bridge Deck, Sidewalk, Barriers And Curbs, Diaphragms, and Approach Slabs.**

2703.7.A Paragraph 2703.7.A shall be revised to read:

2703.7.A Three cylinders shall be taken on each continuous pour for every 50 cubic yards (35 cubic meters), or fraction thereof, placed in one continuous operation. The cylinders shall be made in accordance with AASHTO T23-73 (ASTM C-31) procedures. The set of three cylinders shall be identified as to time and location of placement. One cylinder of the set shall be tested at seven days and the other two cylinders tested at twenty-eight days. All tests shall be performed in accordance with AASHTO T22-92 (ASTM C39-96) procedures.

*During concrete placement, if more than 100 cubic yards is to be placed in a single day, the contractor shall supply a water tank to cure all test cylinders in for the first 24 hours after the pour. The tanks shall be of sufficient size to hold three 6”X12” cylinders for every 50 cubic yards poured that day and to allow for the water to maintain a temperature between 60°F and 80°F after being filled with water from the ready mix delivery trucks. The contractor shall be responsible for protecting persons from entering the tanks.*

## RESOLUTION

Be it resolved by the Director of Public Works of Kansas City, Missouri that the following listed Section of Division II, Construction and Materials Specifications, approved and adopted May 23, 2001 by the Kansas City Metropolitan Chapter of the American Public Works Association is approved and adopted as Official Standard Construction and Materials Specifications for the Department of Public Works of Kansas City, Missouri with like section and page numbers, except as modified by the replacement pages of the February 2004 KCMO Supplement and hereby further modified by the attached supplement.


Section 2700 Structures

A copy of said specifications criteria and supplement are attached hereto and incorporated herein by reference.

The criteria shall become effective August 1, 2006 and shall modify all previously adopted supplements to this section.

Approved and adopted as Official Document No. CS070029

this 18<sup>th</sup> day of July, 2006.

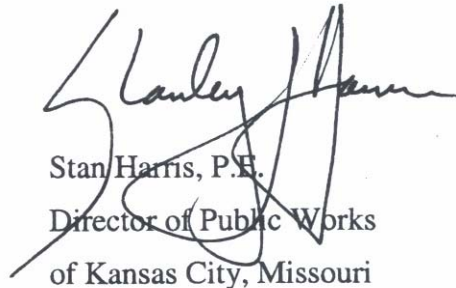

Stan Harris, P.E.  
Director of Public Works  
of Kansas City, Missouri